

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



10/516514




(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/103363 A1

- (51) International Patent Classification⁷: H05K 13/04
- (21) International Application Number: PCT/IB03/02329
- (22) International Filing Date: 21 May 2003 (21.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02077166.3 3 June 2002 (03.06.2002) EP
- (71) Applicant (for all designated States except US): ASSEMBLEON N.V. [NL/NL]; Hurkseweg 19, NL-5652 AH Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): VAN GASTEL, Josephus, M., M. [NL/NL]; Hurksestraat 19, NL-5652 AH Eindhoven (NL).
- (74) Agent: BOS, Kornelis, S.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD SUITABLE FOR PLACING AT LEAST ONE COMPONENT IN A DESIRED POSITION ON A SUBSTRATE BY MEANS OF A DEVICE, AND SUCH A DEVICE

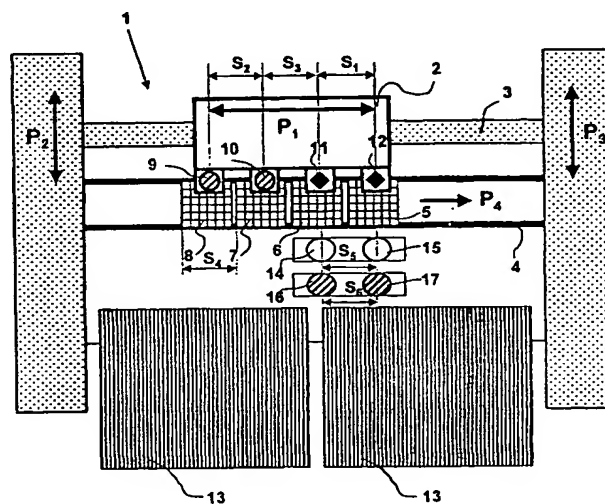

(57) Abstract: Method and device suitable for placing components in a desired position on at least one substrate (5 to 8). The device comprises a movable arm (2) on which at least two image recording devices (9, 10) a predetermined pitch distance (S2) as well as two placement devices (11, 12) with the same pitch distance (S1) are present. The spacing between the image recording devices and the placement devices amounts to once the pitch distance or a multiple thereof. A picture is taken of at least one reference element present on a substrate by at least one image recording device, and simultaneously therewith a component is placed on a substrate by at least one placement device.

WO 03/103363 A1